

# Product Catalogue

Version 8.0

Section

# C



## Electrical Components




## Index

2 Core Electrical Cable	C:1
3 Core Electrical Cable	C:1
4 Core Electrical Cable	C:1
5 Core Electrical Cable	C:1
7 Core Electrical Cable	C:1
8 Way Junction Box	C:6
Additional parts for Plugs ABS	C:6
Additional parts for sockets ABS	C:6
Air Hon	C:9
Bulb	C:8-C:9
Cables ABS (24V)	C:3
Flasher Relay	C:7
Meter Bulb	C:8
Normal Plugs - ISO 1185	C:4
Normal Plugs - ISO 1724	C:3
Normal Socket - ISO 1724	C:3
Normal Sockets - ISO 1185	C:4
Plug - ISO 12098	C:5
Relay	C:7, C: 10
Reverse Buzzer	C:9
Socket - ISO 12098	C:5
Spiral Cables ABS with plugs - ISO 7638-1	C:3
Spiral Cables with plugs - ISO 1185	C:2
Spiral Cables with plugs - ISO 12098	C:2
Spiral Cables with plugs - ISO 3731	C:2
Supplementary Plug - ISO 3731	C:4
Supplementary Sockets - ISO 3731	C:4




**2 Core Electrical Cable**

Part No :	Length
TL-15-113-001265-723	80m per roll




**3 Core Electrical Cable**

Part No :	Length
TL-15-113-280107-723	90m per roll



**4 Core Electrical Cable**

Part No :	Length
TL-15-113-801026-723	90m per roll



**5 Core Electrical Cable**

Part No :	Length
TL-15-113-021106-723	90m per roll



**7 Core Electrical Cable**

Part No :	Length
TL-15-113-001347-723	100m per roll




**7 Core Electrical Cable**


Part No :	Length
TL-15-113-400040-ALL	3.0m , UK
TL-15-113-640040-ALL	4.5m , UK




**Spiral Cables with plugs - ISO 1185**

	Part No :	Description
	TL-15-113-611016-SUP	7 pin/24 volts spiral cable , 7x1,5mm <sup>2</sup> , contact compartment waterproofed compound filled, coil diameter 110mm
		Working length                      Maximum extension length 3,0m                                      4,5m
	TL-15-113-611017-SUP	7 pin/24 volts spiral cable , 6x1,0mm <sup>2</sup> +1x1,5mm <sup>2</sup> , bending protection grommets , contact compartment waterproofed compound filled, coil diameter 50mm
		Working length                      Maximum extension length 3,0m                                      4,5m
	TL-15-113-611038-SUP	7 pin/24 volts spiral cable , 6x1,0mm <sup>2</sup> +1x1,5mm <sup>2</sup> , bending protection grommets , coil diameter 50mm
		Working length                      Maximum extension length 3,0m                                      4,5m


**Spiral Cables with plugs - ISO 3731**

	Part No :	Description
	TL-15-113-611025-SUP	7 pin/24 volts supplementaty spiral cable , 6x1,0mm <sup>2</sup> + 1x1,5mm <sup>2</sup> , bending protection grommets, contact compartment waterproofed compound filled, coil diameter 50mm
		Working length                      Maximum extension length 3,0m                                      4,5m

**Spiral Cables with plugs - ISO 12098**

	Part No :	Description
	TL-15-113-641060-SUP	13 pin/24 volts - ADR/GGVS Sprial cable, 5x2,5mm <sup>2</sup> +8x1,5mm <sup>2</sup> , bending protection grommets, coil diameter 110mm
		Working length                      Maximum extension length 4,5m                                      5,5m

**Spiral Cables with plugs - ISO 12098**

	Part No :	Description
	TL-15-113-641019-SUP	15 pin/24 volts - ADR/GGVS Sprial cable, 3x2,5mm <sup>2</sup> +12x1,5mm <sup>2</sup> , bending protection grommets, coil diameter 110mm
		Working length                      Maximum extension length 4,5m                                      5,5m
	TL-15-113-641124-SUP	15 pin/24 volts - ADR/GGVS Sprial cable with CAN-data cores, 3x2,5mm <sup>2</sup> +12x1,5mm <sup>2</sup> , bending protection grommets, coil diameter 110mm
		Working length                      Maximum extension length 4,5m                                      5,5m

**Spiral Cables ABS with plugs - ISO 7638-1**



Part No :  
TL-15-113-641008-SUP

Description  
ABS/24V-ADR/GGVS spiral cable,  
3x1,5mm<sup>2</sup>+2x4,0mm<sup>2</sup> bending protection grommets,  
coil diameter 110mm  
Working length                      Maximum extension length  
4,5m                                      5,5m

TL-15-113-641122-SUP

Description  
ABS/24V-ADR/GGVS spiral cable,  
3x1,5mm<sup>2</sup>+2x4,0mm<sup>2</sup> bending protection grommets,  
coil diameter 110mm  
Working length                      Maximum extension length  
4,5m                                      5,5m

**Cables ABS (24V)**



Part No :  
TL-15-113-541105-SUP


Description  
ABS/24V-ADR/GGVS supply cable with socket,  
180° outlet, 3x1,5mm<sup>2</sup>+2x4,0mm<sup>2</sup>  
Working length  
8,0m

**Normal Socket - ISO 1724**



Part No :  
TL-15-113-101028-SUP

Description  
7 pin/12 volts with aluminium  
housing

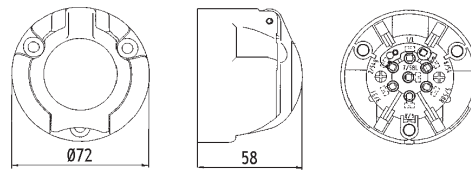


**Normal Plugs - ISO 1724**



Part No :  
TL-15-113-201005-SUP

Description  
7 pin/12 volts plug , vertically divided , aluminium  
housing with cap nut and grommet , screw terminals

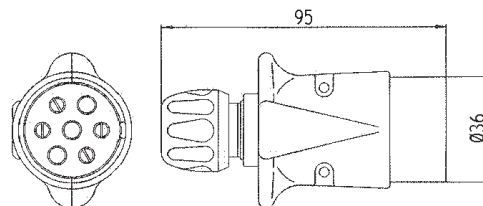


**Normal Sockets - ISO 1185**



Part No :  
 TL-15-113-111021-SUP  
 TL-15-113-111022-SUP

Description  
 7 pin/24 volts with screw terminals

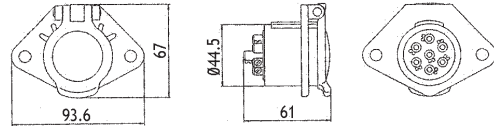


**Normal Plugs - ISO 1185**



Part No :  
 TL-15-113-211035-SUP

Description  
 7 pin/24 volts plug , aluminium housing with seal cap , screw terminals

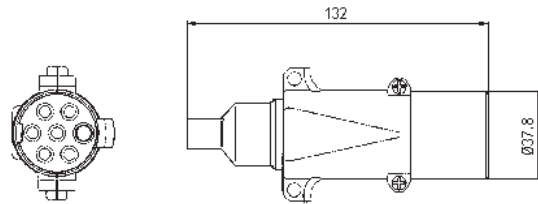


**Supplementary Sockets - ISO 3731**



Part No :  
 TL-15-113-111024-SUP  
  
 TL-15-113-111025-SUP

Description  
 7 pin/24 volts supplementary socket with screw terminals  
 7 pin/24 volts supplementary socket plastic housing with screw terminals

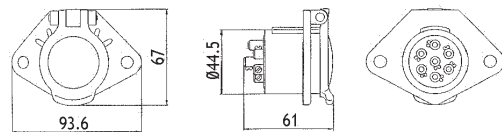


**Supplementary Plug - ISO 3731**



Part No :  
 TL-15-113-211018-SUP  
  
 TL-15-113-211037-SUP

Description  
 7 pin/24 volts supplementary plug, plastic housing with seal cap , screw terminals  
 7 pin/24 volts supplementary plug, metal housing with seal cap , screw terminals

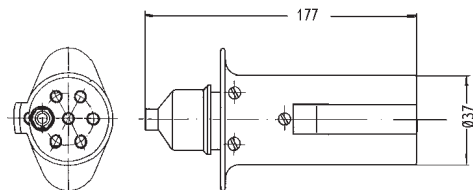




**Socket - ISO 12098**

Part No :  
TL-15-113-141013-SUP


Description  
13 pin / 24 volts - ADR/GGVS socket for cable,  
180° bayonet outlet, with crimp-contact-pins  
6x2,,5mm<sup>2</sup> , 7x1,0-1,5mm<sup>2</sup>) in poly-bag

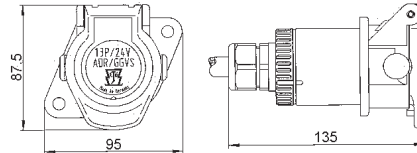

**Plug - ISO 12098**

Part No :  
TL-15-113-241057-SUP


Description  
13 pin / 24 volts plug for cable connection with  
cap nut for cable diameter D12-18,0mm,  
with crimp-c contact-sockets  
(3x2,,5mm<sup>2</sup> , 12x1,0mm<sup>2</sup>) in poly-bag

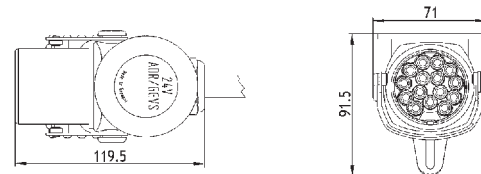

**Socket - ISO 12098**

Part No :  
TL-15-113-141024-SUP


Description  
15 pin / 24 volts - ADR/GGVS socket for cable,  
180° bayonet outlet, with crimp-contact-pins  
(3x2,,5mm<sup>2</sup> , 12x1,0mm<sup>2</sup>) in poly-bag

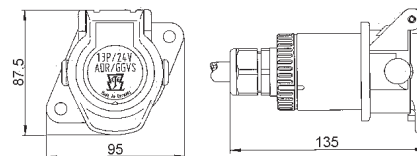

**Plug - ISO 12098**

Part No :  
TL-15-113-241056-SUP

Description  
15 pin / 24 volts - ADR/GGVS plug for cable  
connection with cap nut for cable diameter  
D12,0-18,0mm, with crimp-c contact-sockets  
(3x2,,5mm<sup>2</sup> , 12x1,0mm<sup>2</sup>) in poly-bag

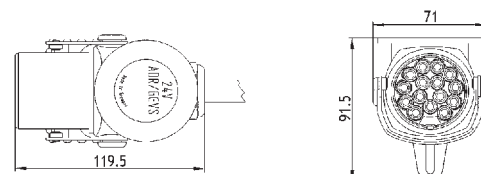



**Additional parts for sockets ABS**

Part No :  
 TL-15-113-257353-SUP  
 TL-15-113-257363-SUP  
 TL-15-113-257373-SUP  
 TL-15-113-257383-SUP

Description  
 Contact pins with crimp terminals for cross sectional area  
 1,0-1,5mm<sup>2</sup>  
 2,5mm<sup>2</sup>  
 4,0mm<sup>2</sup>  
 6,0mm<sup>2</sup>



**Additional parts for Plugs ABS**


Part No :  
 TL-15-113-361037-SUP

Description  
 Portable workshop set, equipped with a complete set of sockets and plugs ABS-ADR/GGVS, with crimping tool and assembling auxiliaries




**Britax 8 Way Junction Box**

Part No :  
 TL-15-113-354000-BRI

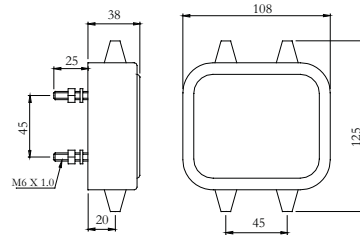


**Effi 8 Way Junction Box**

Part No :  
 TL-15-113-003540-EFF



**Lumax 8 Way Junction Box**

Part No :  
 TL-15-113-005047-LMX





 <p><b>Relay</b> Part No : 00-15-113-204118-BOS Volts : 12V Remarks : 5 pin</p>	 <p><b>Relay</b> Part No : 00-15-113-204203-BOS Volts : 24V Remarks : 5 pin</p>
 <p><b>Flasher Relay</b> Part No : 00-15-113-123ALB-AE0 Volts : 12V Remarks : 3 pin</p>	 <p><b>Flasher Relay</b> Part No : 00-15-113-G225AB-AE0 Volts : 24V Remarks : 3 pin</p>
 <p><b>Flasher Relay</b> Part No : 00-15-113-SG124A-AE0 Volts : 12V Remarks : 3 pin</p>	 <p><b>Flasher Relay</b> Part No : MB-15-113-449932-MBG Volts : 12V Remarks : 4 pin</p>
 <p><b>Flasher Relay</b> Part No : MB-15-113-440032-MBG Models : 911C Volts : 12V Remarks : 4 pin</p>	 <p><b>Flasher Relay</b> Part No : MB-15-113-447332-KOS Part No : MB-15-113-447332-MAR Models : MBB709 Volts : 12V Remarks : 4 pin</p>
 <p><b>Flasher Relay</b> Part No : MB-15-113-447132-KOS Part No : MB-15-113-447132-MAR Models : 1314 Volts : 12V Remarks : 10 pin</p>	 <p><b>Flasher Relay</b> Part No : 00-15-113-00B0149-AE0 Models : 1314 Volts : 12V Remarks : 10 pin</p>
 <p><b>Flasher Relay</b> Part No : MB-15-113-440632-Z00 Models : 1619 Volts : 24V Remarks : 11 pin</p>	



**Meter Bulb**

Part No : 00-15-113-017022-NVA  
 Models : 17022  
 Volts : 24V



**Meter Bulb**

Part No : 00-15-113-017039-NVA  
 Models : 17039  
 Volts : 24V



**Meter Bulb**

Part No : 00-15-113-017197-NVA  
 Models : 17197  
 Volts : 24V



**Metal Bulb**

Part No : 00-15-113-017040-NVA  
 Models : 17040  
 Volts : 24V



**1141 Bulb**

Part No : 00-15-113-002322-Z00  
 Part No : 00-15-113-017643-NVA  
 Part No : 00-15-113-114124-802  
 Volts : 24V



**1016 Bulb**

Part No : 00-15-113-002342-Z00  
 Part No : 00-15-113-017925-NVA  
 Part No : 00-15-113-017925-802  
 Volts : 24V



**4038 Bulb**

Part No : 00-15-113-017063-NVA  
 Models : 4038  
 Volts : 24V



**87 Bulb**

Part No : 00-15-113-006724-049  
 Models : 1619  
 Volts : 24V



**11X39 Bulb**

Part No : 00-15-113-017136-NVA  
 Models : 1619  
 Volts : 24V



**H21 Bulb**

Part No : 00-15-113-068196-NVA  
 Volts : 24V



**H1 Bulb**

Part No : 00-15-113-048702-NVA  
 Part No : 00-15-113-062200-OSR  
 Volts : 24V



**H4 P45T Halogen Bulb**

Part No : 00-15-113-048884-NVA  
 Volts : 12V



**H3 Bulb**

Part No : 00-15-113-048700-NVA  
 Part No : 00-15-113-090253-HEL  
 Part No : 00-15-113-H32470-802  
 Volts : 24V

Part No : 00-15-113-090451-HEL  
 Volts : 24V



**H4 P43T 24V Halogen Bulb**

Part No : 00-15-113-012569-049  
 Part No : 00-15-113-048892-NVA  
 Part No : 00-15-113-064196-OSR  
 Volts : 24V

Part No : 00-15-113-048881-NVA  
 Volts : 12V  
 Watts : 60/55W



**Reverse Buzzer**

Part No : 00-15-113-601024-802  
 Volts : 24V



**Air Horn**

Part No : 00-15-113-80AH12-SEG  
 Volts : 12V



**Relay**

Part No : 00-15-826-L04200-QNE

Volts : 24V

Remarks : 4 pin, Flash Pattern for Quad Flash



**Relay**

Part No : 00-15-826-L04200-QNE

Volts : 12V / 24V

Remarks : 12 pin, Flash Pattern for Multi-function